


est. 1946  
DARE



SINCE 1946

# PRODUCT CATALOG

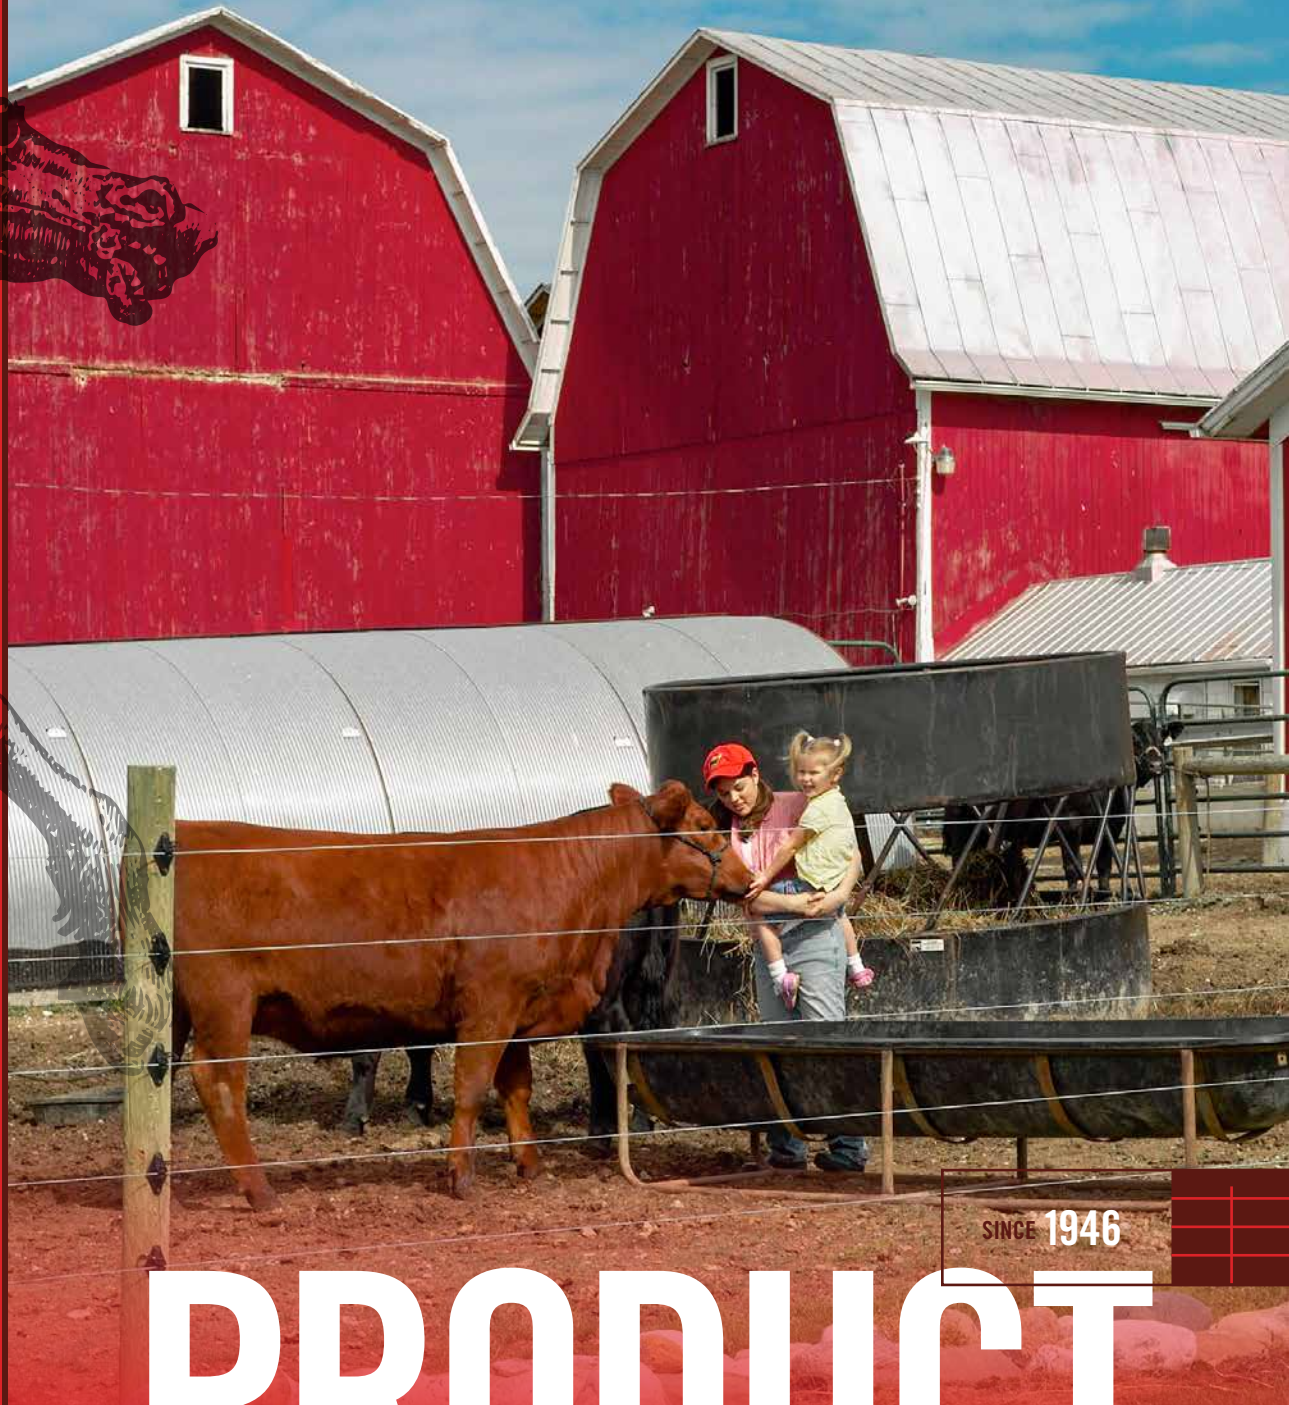

---

DARE

# WHAT'S INSIDE



- 3 FENCE ENERGIZERS**
- 6 FAULT FINDER  
/ GARDEN GROW KIT**
- 8 GATE HANDLES  
AND GATE HARDWARE**
- 10 INSULATORS AND LOCKJAWZ**
- 17 FASTENERS AND CLIPS**
- 17 ELECTRIC FENCE POSTS**
- 19 ALUMINUM ELECTRIC WIRE  
AND ELECTRIC NETTING**
- 20 POLY FENCING  
AND EQUINE PRODUCTS**
- 24 POLY TAPE AND POLY WIRE  
ACCESSORIES**
- 26 HIGH TENSILE  
FENCE SUPPLIES**
- 28 SPLICING EQUIPMENT AND TOOLS**
- 31 GRIPPLE PLUS & JAKES TIGHTENERS**
- 32 ELECTRIC FENCE TESTERS  
AND MISCELLANEOUS PARTS**
- 33 PANS AND PAILS**
- 34 INSTALLATION ACCESSORIES**
- 36 FARM TANK FLOAT VALVES**
- 37 PLANOGRAMS  
AND MERCHANDISING**

## THE DARE WAY.

SINCE 1946, DARE HAS WITHSTOOD THE TEST OF TIME, BY DOING WHAT WE'VE ALWAYS DONE BEST—MANUFACTURING A FULL LINE OF QUALITY ELECTRIC FENCING EQUIPMENT AND OTHER RELATED PRODUCTS.

Our philosophy is simple—continue manufacturing quality products to enhance the long term customer relationships. Strive to be the industry leader in product quality and innovation.

And above all, guarantee overall customer satisfaction...

That's the Dare way!

ELECTRIC  
FENCING

# ENERGIZERS

OUTPERFORMING  
THE COMPETITION

## 110 AC PLUG-IN



## 12-6 VOLT SOLAR



## 12 VOLT DC/110 AC BATTERY & PLUG-IN



DARE PRODUCTS' WIDE RANGE OF HIGH PERFORMANCE ELECTRIC FENCE ENERGIZERS. ALL DARE ENERGIZERS USE **ULTRA LOW OR LOW IMPEDANCE TECHNOLOGY** WITH THESE STANDARD FEATURES:

- Modular circuitry for fast and easy service
- All weather construction for longer life
- Peak Joule output under the most difficult fence conditions
- Two year OTC warranty including lightning damage
- Built in lightning protection
- UL and CSA approved on most models
- Designed and assembled in USA

### TWO YEAR OVER THE COUNTER WARRANTY

Dare Products warrants all fence energizers to the original purchaser for a period of two (2) years from the date of purchase, when installed in accordance

with the installation instructions. Warranty also covers damage to the energizer caused by lightning and voltage spikes.



# ENFORCER

## 110 VOLT MODELS



Best value! Provides the most output for each dollar spent. Use where electrical power source is available—only costs pennies a day to operate. When possible, 110 volt models are always the first choice.



DE 2400  
DE 4000



DE 300 DE 400  
DE 600 DE 1200



DE 120  
DE 200



DE 80



DE 60



DE 20

| MODEL   | ACRES | JOULE OUTPUT | OUTPERFORMS COMPETITORS AT |
|---------|-------|--------------|----------------------------|
| DE 4000 | 1,000 | 10 JOULE     | 150 MILES                  |
| DE 2400 | 600   | 6 JOULE      | 100 MILES                  |
| DE 1200 | 300   | 3 JOULE      | 75 MILES                   |
| DE 600  | 150   | 1.5 JOULE    | 50 MILES                   |
| DE 400  | 100   | 1 JOULE      | 25 MILES                   |
| DE 300  | 75    | 0.75 JOULE   | 20 MILES                   |
| DE 200  | 50    | 0.5 JOULE    | 10 MILES                   |
| DE 120  | 20    | 0.3 JOULE    | 5 MILES                    |
| DE 80   | 5     | 0.05 JOULE   | —                          |
| DE 60   | 3     | 0.01 JOULE   | —                          |
| DE 20   | 1     | 0.07 JOULE   | —                          |



SCAN THE QR CODE  
TO SEE **ANIMALS**  
TO BE CONTROLLED

# SENTRY

## 6 & 12 VOLT BATTERY MODELS



Better value! Provides more output for each dollar spent. If an electrical power source is not available, the external 12 volt rechargeable battery model is a great alternative. \* Deep cycle batteries recommended.



DBS 100  
DS 300



DS 140  
DSX 140  
12 VOLT OR 4 'D' CELL ALKALINE



DS 400



DS 800

| MODEL   | ACRES | JOULE OUTPUT | OUTPERFORMS COMPETITORS AT |
|---------|-------|--------------|----------------------------|
| DSB 100 | 25    | 0.25 JOULE   | 5-10 MILES                 |
| DS 140  | 35    | 0.35 JOULE   | 5-10 MILES                 |
| DSX 140 | 35    | 0.35 JOULE   | 5-10 MILES                 |
| DS 300  | 75    | 0.75 JOULE   | 10-20 MILES                |
| DS 400  | 100   | 1 JOULE      | 20-30 MILES                |
| DS 800  | 200   | 2 JOULE      | 30-50 MILES                |



SCAN THE QR CODE  
TO SEE ANIMALS  
TO BE CONTROLLED

# ECLIPSE


## 6 & 12 VOLT SOLAR BATTERY MODELS



Most convenient. The 6 or 12 volt solar energizer is ideal for use in remote areas where an electrical power source is not available. These models have a self-contained battery and may be preferred for its convenience.



DS 20



DS 40



DS 100



DS 200

| MODEL  | VOLT | ACRES | JOULE OUTPUT | OUTPERFORMS COMPETITORS AT |
|--------|------|-------|--------------|----------------------------|
| DS 20  | 6    | 10    | 0.07 JOULE   | 1-3 MILES                  |
| DS 40  | 12   | 40    | 0.1 JOULE    | 5-10 MILES                 |
| DS 100 | 12   | 100   | 0.25 JOULE   | 10-25 MILES                |
| DS 200 | 12   | 200   | 0.5 JOULE    | 25-50 MILES                |



SCAN THE QR CODE  
TO SEE ANIMALS  
TO BE CONTROLLED

# POWERPRO<sup>SERIES</sup>

## POWER PRO SERIES

### ULTRA LOW IMPEDANCE

Shocks through wet and heavy vegetation for the toughest electric fence conditions. Controls mid-sized to large animals, exotics and wildlife. Generous user-friendly 2-year OTC warranty—includes lightning damage.

#### “DUAL POWER ENERGIZERS” WITH ADVANCED FEATURES

- AC/DC Dual Power - 110V Plug-in or 12V Battery—clips included
- Ultra Low Impedance - Full and Half Power, Battery Check and Voltage indicator
- Remote Control On/Off Compatible
- Makes Fence Repairs a Snap
- LED Lights Showing Fence Condition and Ground Check



DPP 400  
DPP 1200



DPP 1800  
DPP 3000

REMOTE/  
FAULT  
FINDER  
INCLUDED



DPP 9600

| MODEL                                 | ACRES | JOULE OUTPUT | OUTPERFORMS COMPETITORS AT |
|---------------------------------------|-------|--------------|----------------------------|
| <b>AC/DC 110V PLUG-IN 12V BATTERY</b> |       |              |                            |
| DPP 400                               | 100   | 1 JOULE      | 25 MILES                   |
| DPP 1200                              | 300   | 3 JOULE      | 50 MILES                   |
| <b>AC 110V REMOTE COMPATIBLE</b>      |       |              |                            |
| DPP 1800                              | 450   | 4.5 JOULE    | 75 MILES                   |
| DPP 3000                              | 750   | 7.5 JOULE    | 125 MILES                  |
| DPP 96000                             | 3,000 | 24 JOULE     | 300 MILES                  |



SCAN THE QR CODE  
TO SEE ANIMALS  
TO BE CONTROLLED

# POWERPRO<sup>SERIES</sup>

## FAULT FINDER & REMOTE

Quickly locates faults on your electric fence. Large LCD screen displays fence voltage, amps and direction of fault. Cordless design works on all brands of pulsing energizers. Durable impact and water resistance design with built in belt clip. 9 volt battery sold separately.

#### MODEL # 3460

- 1 to counter pkg
- 4 to shipper
- 4 lbs.

#### MODEL # 3480

#### WITH REMOTE CAPABILITY.

- 1 to counter pkg
- 4 to shipper
- 4 lbs.



#### FOR USE WITH MODELS:

DPP 1800  
DPP 3000  
DPP 9600

# GARDEN GROW ELECTRIC FENCE KIT

Includes everything needed to keep small animals and pets out of unwanted areas, such as gardens, flower beds, trash containers and more.



**MODEL # DEKG 20 'HOW DOES YOUR GARDEN GROW' ELECTRIC FENCE GARDEN KIT**

- 1 to counter pkg
- 2 to shipper
- 16 lbs.

**COMPLETE KIT INCLUDES:**

- 10 Fence Posts (3466)
- Electric Fence Energizer (DE 20)
- 250' Heavy Duty Polywire (3467)
- 1 Ground Rod with Clamp (3469 & 2303)
- 3 Split Bolt Wire Connectors (2083-3)
- 15 ft. x 18 Gauge Hook-Up Wire (3468)
- 1 Fence Tester (460)

# GATE HANDLES & GATE HARDWARE



## OLD IRONSIDES®

MODEL # 1793

- 10 to inner carton
- 50 to shipper
- 39 lbs.

These features make OLD IRONSIDES® better:

- Safety hook and body formed as one...from 7/8" diameter steel pipe.
- Spring mechanism consists of 4 1/4" long compression spring fastened to a 5/16" diameter eye bolt.



## PREMIUM HANDLE

MODEL # 3590

- 10 gates to pkg
- 2 pkgs (20) to shipper
- 8 lbs.

- Extra large flanges prevents getting shocked.
- Heavy duty inner spring and large stamped hook for superior conductivity and ease of use.
- Reinforced tension spring for long life. Molded of high density polyethylene with UV inhibitors.



## RUB'R®

MODEL # 1247

- 10 gates to pkg
- 5 pkgs (50) to shipper
- 15 lbs.



1247



1247 W

Don't be shocked - be safe - with RUB'RGATE electric fence spring gate handle.

- Hard hat yellow.
- RUB'RGATE soft pliable rubber outer case internally reinforced with semi-rigid, non-conductive vinyl inner tube.



## 'OLD FAITHFUL'™

MODEL # 503

- 10 gates to pkg
- 5 pkgs (50) to shipper
- 13 lbs.

- High quality, hi-impact styrene insures long and trouble-free life.
- Measures 4 3/4" between flanges.
- All metal parts plated.



## ANCHOR KIT

MODEL # 3230

- Individually packed
- 10 to shipper
- 4 lbs.

For Wood Post and T-Post.

Consists of:

- Two #2238 anchors
  - Two #2249 insulators with nails
  - Two #2550 insulators.
- (Gate handle not included).



## WOOD POST GATE ANCHOR

**MODEL # 3560**

- 2 to pkg
- 8 pkgs to shipper
- 3 lbs.

Screw in style. Anchors easily into wood post for a strong hold.

- Accommodates all styles of gate handles on the market.
- Heavy duty steel for long life.



## EXPANDO GATE

**MODEL # 2222**

- Individually packed
- 5 to shipper
- 12 lbs.

- Stretches to fit gate opening up to 20 feet.
- Retracts to keep gate off ground when open.
- Electrified when closed, neutral when open.
- Highly visible and effective.



## BUNGEE STYLE GATE

**MODEL # 2950**

- Individually packed
- 5 to shipper
- 6 lbs.

- Safe for horses and all livestock.
- Stretches to fit openings up to 20 feet.
- Hardware included for both Wood and T-Posts.



## ROWND UP LATCH SINGLE

**MODEL # 3258**

- Individually packed
- 6 to shipper
- 15 lbs.

One way universal gate latch. Works on wood, tube, galvanized metal, chain link, ornamental and more.

Self latching one handed operation, locks securely with or without padlock.



## ROWND UP LATCH DOUBLE

**MODEL # 3260**

- Individually packed
- 6 to shipper
- 19 lbs.

Universal gate latch, same as above except two-way. Both models feature universal mounting, universal strike bar, reinforced 10 gauge steel with powder coated finish.

# INSULATOR

## **ROUND POST**



### WESTERN® SCREW-TIGHT

MODEL # **WESTERN-RP-25**

- 25 to pkg
- 20 pkgs (500) to shipper
- 26 lbs.

 **WESTERN-RP-25**

 **WESTERN-RP-25 W**

 **WESTERN-RP-25 B**

Designed to perform with solid state electric fence shockers

- For round posts.



### LARGE WESTERN® FOR SUCKER RODS

MODEL # **XLRP-25**

- 25 to pkg
- 10 pkgs (250) to shipper
- 17 lbs.

 **XLRP-25**

 **XLRP-25 W**

 **XLRP-25 B**

- For sucker rods and other oversized round posts.

- Fits 1/4" to 7/8" dia and 5/8" fiberglass T-Posts.

## **WOOD POST**



### SNUG® 1728-25 INSULATOR

MODEL # **1728-25**

- 25 to pkg
- 20 pkgs (500) to shipper
- 14 lbs.

- Complete with Nails
- For wood posts.
- Extends wire 1" from post.
- Flexible base fits round and flat sided posts.



### SNUG®-SWP-25 SNUG WOOD POST INSULATOR

MODEL # **SNUG-SWP-25**

- 25 to pkg • 20 pkgs (500) to shipper
- 19 lbs.

 **SNUG-SWP-25**

 **SNUG-SWP-25 B**

- Extends wire 1 3/4".
- Nails included.



### WOODEX® 5WP/15


MODEL # **WOODEX 5WP-15**

- 15 to pkgs
- 15 pkgs (225) to shipper
- 21 lbs.

 **WOODEX-5WP-15**

 **WOODEX-5WP-15 B**

- For wood posts.
- Extends wire 5 inches from post.
- Excellent for hogging down over old field fence.
- Strong and sturdy.

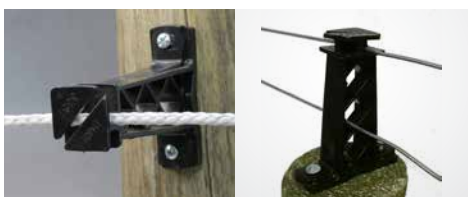

### SNUG®-XWP-15

MODEL # **SNUG-XWP-15**

- 15 to pkg
- 15 pkgs (225) to shipper
- 15 lbs.

- For wood posts.
- Tower style extends wire 3 1/2" from post.
- Use with high tensile and standard wire, polwire and rope up to 3/8" or 1/2" polytape.
- Versatile—can be mounted on top of post.



## SNUG® HT INSULATOR

**MODEL # SNUG-HTN**  
WITH GALVANIZED RING  
SHANK NAILS

- 25 to pkg
- 20 pkgs (500)
- 26 lbs.
- Black

**MODEL # SNUG-HT**  
WITHOUT NAILS

- 25 to pkg
- 20 pkgs (500)
- 19 lbs.
- Black

For wood posts. Designed for high tensile use. Perfect for Equi-Rope and temporary fencing. Large diameter flange prevents arcing. Heavy fingers carry wire 3/4" from post. Offered with galvanized ring shank nails or plain. Molded of high density polyethylene with carbon black for superior UV resistance. Performs in any climate.

*White available, see page 22*



## PINLOCK INSULATOR


**MODEL # 2249-25**  
WITH GALVANIZED RING  
SHANK NAILS

- 25 to pkg.
- 20 pkgs (500)
- 31 lbs.
- Black

**MODEL # 2285-25**  
WITHOUT NAILS

- 25 to pkg.
- 20 pkgs (500)
- 22 lbs.

For wood posts. Heavy cross sections withstand the pressure of high tensile fencing. Attached pin easily locks and unlocks fence wire. Large flange prevents 'shorts' and arcing. Molded of high density polyethylene with carbon black for superior UV resistance. Performs in any climate.



2285-25 Y



2285-25 W




## RING INSULATOR

**MODEL # 2671-25**

- 25 to pkg.
- 10 pkgs (250) to shipper
- 15 lbs.
- Black

For corners, ends and line posts. Angled slot securely holds wire and rope up to 3/8".

*White available, see page 22.*

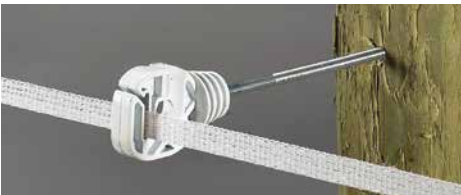

## RING INSULATOR 6" EXTENDER

**MODEL # 2947-10 N**

- 10 to pkg.
- 6 pkgs (60) to shipper
- 6.6 lbs.

Screws into Wood Posts. Holds rope up to 8 MM, 1/2" tape, and wire. White.



## RING INSULATOR POWER DRIVER

**MODEL # 3003**

- Individually packed
- 5 to shipper
- 2 lbs.

- Use with 110V or 12 Volt power drills.

- Works with all Dare ring insulators.



## TUBE STYLE WOOD POST INSULATOR

**MODEL # 1724 N**

- 50 to pkg
- 10 pkgs (500)
- 15 lbs.

**MODEL # 1718**

Without staple

- 50 to pkg
- 20 pkgs (1000)
- 12 lbs.

- Rigid high density polyethylene with carbon black for superior UV resistance.

- Performs in any climate.

- Four inches long x 3/8" diameter. Ribs prevent insulator from sliding.



## PERMATEMP STAPLE INSULATOR

**MODEL # 1710**

- 50 to pkg
- 10 pkgs (500) to shipper
- 13 lbs.

- For wood posts.

- Designed to be used with high tensile permanent electric fence or cameo monofilament line.

- Can be installed after wire is strung.

## 'T' POST



### EXTRA LENGTH SNUG®

**MODEL # SNUG-X5TP-15**  
 • 15 to pkg.  
 • 15 pkgs (225) to shipper  
 • 18 lbs.

 **SNUG-X5TP-15**

 **SNUG-X5TP-15 B**

- For T POSTS. Extends wire 5" from face of post.
- Use to hog down sagging field fence... otherwise same as STP.



### SUPER SNUG®

**MODEL # SNUG-STP-25**  
 • 25 to pkg  
 • 20 pkgs (500) to shipper  
 • 22.5 lbs.

 **SNUG-STP-25**

 **SNUG-STP-25 W**

 **SNUG-STP-25 B**

- For T posts.
- Fits 1.25 & 1.33 lb/ft T posts.
- Large flange prevents arcing.



### SNUG JR.

**MODEL # 1372-25**  
 • 25 to pkg  
 • 20 pkgs (500) to shipper  
 • 13 lbs.

- For small 1.0 lb./ft. T Posts



### STPX-25

**MODEL # STPX-25**  
 • 25 to pkg  
 • 20 pkgs (500) to shipper  
 • 24 lbs.

 **STPX-25**

 **STPX-25 B**

- T post insulator for Equi-Rope, coated wire, & large diameter fence materials up to 3/8".



### EXTRA LENGTH SNUG®

**MODEL # SNUG-XLSTP-25**  
 • 25 to pkg  
 • 10 pkgs (250) to shipper  
 • 12 lbs.

 **SNUG-XLSTP-25**

 **SNUG-XLSTP-25 B**

- For T POSTS. Extends wire 2 1/2" from face of post... otherwise same as STP.



### WESTERN® SCREW TIGHT

**MODEL # 2193-25**  
 • 25 to pkg  
 • 10 pkgs (250) to shipper  
 • 19 lbs.

 **2193-25**

 **2193-25 B**

- For T Posts & sucker rods. Adjusts to fit:
  - T posts, steel - small, medium & large, with or without studs.
  - T posts, fiberglass - medium & large sizes only.
  - Sucker rods - 3/4" diameter only.
  - U posts - small, 1 1/8" wide. Backside only.
  - Small garden U posts—1 1/8" wide.



### REVERSED T POST INSULATOR EXTENDER


**MODEL # SNUG-RT-25**  
 • 25 to pkg  
 • 10 pkgs (250) to shipper  
 • 17 lbs.

 **SNUG-RT-25**

 **SNUG-RT-25 B**

- Holds wire 3" from backside of T-Post.
- Snaps on and around post - insulator faces backward.

Pat. No. 4, 077,611

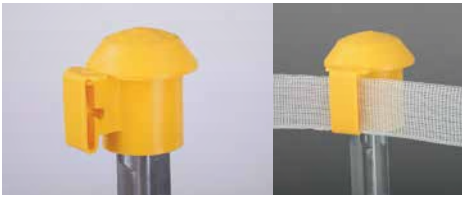

## T POST TOP'R® SAFETY TOP AND ELECTRIC FENCE INSULATOR

MODEL # 2027

- 10 to pkg
- 10 pkgs (100) to shipper
- 16 lbs.

 2027

 2027 W

 2027 B

- Fits all standard T-Posts and can be nailed on top of wood posts.
- Protects horses and other valuable livestock from sharp, jagged T post tops.



## PINLOCK INSULATOR

MODEL # 2550-25

- 25 to pkg
- 20 pkgs (500) to shipper
- 23 lbs.

 2550-25

 2550-25 W

 2550-25 Y

- For T Posts. Fits 1.25 & 1.33 lb/ft posts.
- Heavy cross sections withstand the pressure of high tensile fencing.

# LOCKJAWZ



## LOCKJAWZ INSULATOR

MODEL # T-360

- 25 to pkg
- 20 pkgs (500) to shipper
- 17 lbs.

 T-360 ORANGE

 T-360 BLACK

 T-360 WHITE

 T-360 PURPLE

- Fits all standard T-Posts (1.25-1.33 lb.) and has 6 positions 360° mounting options for both use as an In-Line and T-Post Corner Insulator.
- Easy "Weave-In" wire installation fits: polyrope, polywire, steel/aluminum/high tensile/barbed (single and dual strand) wires.



## LOCKJAWZ HD-360 INSULATOR

MODEL # HD-360

- 25 to pkg
- 20 pkgs (500) to shipper
- 17 lbs.

- Can be installed on both T-post and Wood (1.25-1.33 lb).
- Accepts 2-2.5" Standard Staples when attached to a wood post
- Heavy Duty Construction
- Increased Arc Shielding



## LOCKJAWZ 5" EXTENDED INSULATOR

MODEL # EXT 5.0

- Easy "clip on" installation-attaches to either side of woven/panel fence. Adjustable mounting 4"-8" spacing.



## CORNER BRACE KIT

MODEL # CB-360-TP

- 1 to pkg
- 10 pkgs to shipper
- 11 lbs.

MODEL # CB-360-WP

- 1 to pkg
- 10 pkgs to shipper
- 9 lbs.

- FINALLY - AN EASIER CORNER BRACE THAT ACTUALLY WORKS-GUARANTEED!
- T-Post will not ground out on hot wire even if it touches the brace posts.
- 360° fully adjustable. Great for uneven terrain.




## SPRING WIRE T-POST CLIP

MODEL # TSWC-50

- 50 to pkg
- 24 pkgs to shipper
- 22 lbs.

FINALLY - A BETTER SOLUTION!

- Spring clip snaps into place—No tools or crimping.
- Reusable.

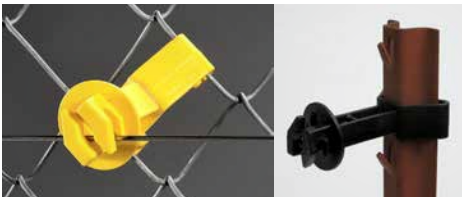**'U' POST****SNUG® INSULATORS****MODEL # SNUG-SU-25**

Fits 1 3/4" to 2 1/8"

- Fits wide posts.
- 25 to pkg
- 10 pkgs (250)
- 14 lbs.

 **SNUG-SU-25****MODEL # XLSU-25**

Fits 2 3/8" wide Steel City posts.

- Holds wire 1" from post.
- 25 to pkg
- 20 pkgs (500)
- 20lbs.

 **SNUG-SU-25 B**

- For U Posts & chain link fence.
- Holds wire 2 3/4" from post.
- Solid wire holders take smooth, barbed and polywire.

**GARDEN U-POST INSULATOR****MODEL # SNUG-LGU-25**

Fits 1 3/4" to 2 1/8" wide posts.

- 25 to pkg
- 10 pkgs (250) to shipper
- 8 lbs.

- Fits all 1" to 1 3/8" U-posts.
- Ideal for gardens and light duty electric fencing.
- Holds wire 3/4" from post. Snaps on without tools.

Pat. No. D 669,437

**U POST TOP'R® SAFETY TOP AND ELECTRIC FENCE INSULATOR****MODEL # 2087**

- 10 to pkg
- 10 pkgs (100) to shipper
- 15 lbs.

 **2087** **2087 W**

- Fits 1 3/4" and 2 1/8" wide full weight U posts.
- Protects horses and other valuable livestock from sharp post tops.
- Large, heavy-duty cap/insulator can be installed with wire holders facing front or back.

Pat. Nos. 4,680,428 6,353,187

**INSULATOR FOR CHAIN LINK POSTS, TOP RAIL, TUBE GATES & CORRAL PANELS****MODEL # 3359-10**

- 10 to pkg
- 10 pkgs (100) to shipper
- 18 lbs.

- Fits vertical or horizontal tubes/pipes up to 2" round or square.
- Holds rigid wire up to 5/16" and pliable ropes up to 3/8". Extends wire 3.5" from post.
- Heavy duty 1/4" hardware included.

**TRADITIONAL STYLE****ELFIN® ELECTRIC FENCE INSULATOR****MODEL # ELF-WP-25**

WITH NAIL FOR WOOD POSTS

- 25 to pkg
- 20 pkgs (500) to shipper
- 15 lbs.

- For wood posts. Weather resistant black polyethylene performs in any climate.
- One wire holder takes any standard fence wire.
- Metal wire holding clip not required.

**ELFIN® EXTENDER INSULATOR****MODEL # 1362-10**

- 10 to counter pkg
- 10 pkgs (100) to shipper
- 16 lbs.

- For T Post, U Post & chain link fence. Extends wire five inches from fence.
- Fits either side of chain link, studded T & U posts.
- Consists of heavy steel bracket with Elfin® insulator, screw, and cotter pin.



## DARE BLACK WIDOW™ ELECTRIC FENCE INSULATOR

**MODEL #**  
**BW-WP-25**  
BLACK WIDOW™  
WITH NAIL FOR  
WOOD POSTS  
• 25 to pkg  
• 20 pkgs (500)  
• 15 lbs.

**MODEL #**  
**BW-RS-100**  
BLACK WIDOW™  
INSULATOR ONLY  
• 100 to pkg  
• 5 pkgs (500)  
• 10 lbs.

**MODEL #**  
**BW-RS-25**  
BLACK WIDOW™  
INSULATOR ONLY  
• 25 to pkg  
• 20 pkgs (500)  
• 10 lbs.

- High density black linear polyethylene with UV inhibitors.
- Operates well in any climate, in any part of the world.
- 45 degree slot easily accepts any fence wire and holds it in place.
- BLACK WIDOW™...a very good insulator.

## PORCELAIN & PORCELAIN STYLE



## HEX HEAD DRIVEABLE LAG INSULATORS

**MODEL #** **3999 HD**  
• 25 to shipper  
• 6 lbs.

- Heavy duty for corners and line posts.
- Designed to be used with standard fence wire, polywire, and rope.
- Drivable with 1/2" ratchet or 1 1/4" socket.
- Shipped in attractive retail display box.



## TRIPLE GROOVE LINE INSULATORS

**MODEL #** **TGN-25**  
INSULATORS WITH NAILS  
• 25 to pkg  
• 20 pkgs (500) to shipper  
• 20 lbs.

- Old-fashioned style insulators molded of modern high density polyethylene.
- Smooth and glossy like porcelain.
- Takes any size fence wire.
- Install like any insulators.



## PORCELAIN LINE INSULATORS

**MODEL #** **16D-25 N**  
Standard size porcelain  
line insulator with 10d  
double headed nail and  
poly washer.  
Use for line and  
corners.  
• 25 to pkg  
• 10 pkgs (250)  
• 24 lbs.

**MODEL #** **2799-25**  
Large porcelain lag  
insulator. Heavy  
duty. Use for line and  
corners.  
• 25 to pkg.  
• 2 pkgs (50)  
• 29 lbs.

- Produced from specially formulated electrical porcelain for superior dielectric and mechanical strength.
- Imported.
- Standard size porcelain line insulator with 10d double headed nail and poly washer.



**MODEL #** **2802-25**  
Small porcelain lag  
insulator.  
Use for line and  
corners.  
• 25 to pkg  
• 4 pkgs (100)  
• 23 lbs.

**MODEL #** **2356-10 N**  
Heavy duty porcelain  
corner insulator.  
No. 36  
• 10 to pkg.  
• 10 pkgs (100)  
• 20.5 lbs.

**CORNER****ROUNDER™ CORNER****MODEL # 1388-10**

- 10 to pkg
- 25 pkgs (250) to shipper
- 8 lbs.

- White polyethylene corner knob insulator.
- Looks like porcelain.
- Weighs less. Works great.

**CORNER POST INSULATOR****MODEL # BW-CP-10**

- 10 to pkg
- 25 pkgs (250) to shipper
- 6 lbs.

- Insulator opens and latches closed for ease of fence installation.
- Molded of high density polyethylene with carbon black for superior UV resistance.
- Performs in any climate.

**CORNER KNOB INSULATOR****MODEL # BW-KK-10**

- 10 to pkg
- 25 pkgs (250) to shipper
- 7 lbs.

- Large flanges.
- Heavy center section.
- Large enough to withstand strain of fence wire and offer complete insulation.
- Flexible tabs speed installation.

**HIGH STRAIN CORNER AND END INSULATOR****MODEL # 1752-10**

- 10 to pkg
- 25 pkgs (250) to shipper
- 12 lbs.

- Molded of high strength engineering grade polymer.
- Able to withstand the constant pressure of high tensile fence wire.
- Use for corners, ends, dips and rises.

**“EGG” STYLE CORNER AND END INSULATOR****MODEL # 2949-10**

- 10 to pkg
- 10 pkgs (100) to shipper
- 8 lbs.

- Glass reinforced polyester.
- Strongest Dare corner.

**TUBULAR CORNER POST & END POST INSULATOR****MODEL # 1779**

- 10 top kg
- 10 pkgs (100)
- 16 lbs.

**MODEL # 3015**

- 100' coil

- Provides insulation for 90° turn or end loop on any style post.
- Flat-sided design resists rolling and speeds installation.
- Heavy sidewalls provide extra protection against 'shorts' or 'grounds'.

**HIGH STRAIN CORNER & END ASSEMBLY****MODEL # 451**

- 10 assemblies to pkg
- 5 pkgs (50) to shipper
- 16 lbs.

**MODEL # 451-4**

- 4 each to pkg
- 6 pkgs to shipper
- 8 lbs.

- Performs superbly from any wood post or tree - as a corner - for straight line fencing.
- Consists of 3/8" diameter hi-carbon steel bracket, 1752 insulator and self-locking nut.
- Wire clip may be required when used for straight line fencing.

# FASTENERS & CLIPS



## 'TWISTER' COTTER CLIP

MODEL # 458

- 100 to pkg
- 10 pkgs (1000) to shipper
- 5 lbs.

- Fasten wire to pre-drilled posts or sucker rods.
- Use to attach 'old-style' insulators to drilled posts.
- 14 ga. galvanized wire.
- A favorite on the Gayle farm in Kansas.




## 'CLIPPER'

MODEL # 457-50

- 100 to pkg
- 10 pkgs (1000) to shipper
- 5 lbs.

- Wire to insulator fastening clip. Handy spring clip for fastening electric fence wire to grooved insulators.
- Galvanized spring wire.

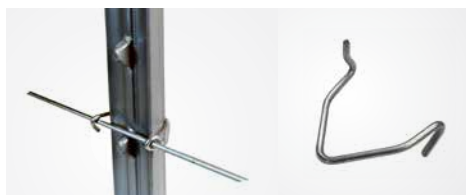

## STUDDERED 'T' POST FASTENING CLIPS

MODEL # 440

- 25 to pkg
- 40 pkgs (1000)
- 19 lbs.

MODEL # 440-100

- 100 to pkg
- 10 pkgs (1000)
- 19 lbs.

- For 1.25 & 1.33 LB/FT standard size STUDDERED T POSTS.
- Not for electric fence.
- Heavily galvanized 11 gauge wire.



## CLIP FOR WOOD & POLY BATTENS

MODEL # 1699

- 100 to pkg
- 10 pkgs (1000) to shipper
- 26 lbs.

- Fits all sizes up to 2"x 2".
- Use to fasten high tensile, ordinary electric, non-electric, smooth or barbed fence wire to treated wood and poly battens.
- 12 1/2 gauge type III galvanized wire.

# ELECTRIC FENCE POSTS



## STEP-IN POLY POST

MODEL # 2400

- 50 to carton
- 39 lbs.

- Available in Black, White, Yellow, Orange, and Purple
- Ideal for temporary electric fencing such as controlled grazing/pasture management.



2400



2400 W



2400 Y



2400 O



2400 PURPLE



## STIRRUP STYLE STEP-IN POLY POST

MODEL # 2700 W

- 20 to carton
- 22.8 lbs.

- 61 3/4" Step-in Poly Post with Built-in Stirrup for easy use.



## PIG TAIL STEP-IN POST

**MODEL # 3600**

- 20 per bundle
- 21 lbs.

42" overall, 35" above ground.

- Ideal for temporary electric fencing for grazing and pasture management.
- Heavy duty 9/32" galvanized steel rod.
- Use with all types of wire, rope, or polytape.



## FIBERGLASS STEP IN POST

**MODEL # 3650**

- 20/CTN
- 11#/CTN

STEP IN POST

- 4' X 3/8" FIBERGLASS POST
- WITH UV INHIBITOR WHITE POST / GREEN STEP PLATE & WIRE HOLDERS




## DARE WESTERN® / SET-EZE® STEEL POSTS

**MODEL # 1552-48**

Steel rod 5/16" dia. x 48" with wrap around welded anchor plate.

- 25 posts per bundle
- 28 lbs.

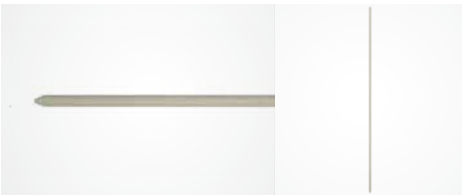

## FIBERGLASS STEP IN POST

**MODEL # 3648**

- 10/BDL
- 60/CTN
- 22.6#/CTN

FIBERGLASS POST (ONLY)

- 4' X 3/8" FIBERGLASS POST
- WITH UV INHIBITOR



## SPRING CLIPS WITH DRIVE CAP

**MODEL # 3675-25**

- 10 PKGS/CTN
- 3#/CTN

SPRING CLIPS WITH DRIVE CAP (FITS 3/8" POSTS) 3675-25

- USE – For Steel or Aluminum Wire
- Not Intended for Poly Wire or Rope
- DRIVE CAP INCLUDED Prevents Fiberglass Rods From Splintering
- For Temporary Fencing Only



## 28" GARDEN POLY POST

**MODEL # 3466**

- 20/CTN
- 5#/CTN

Molded of UV resistant polypropylene. Four wire holders. GREEN.

# ALUMINUM ELECTRIC FENCE WIRE

**MODEL # 14AL1320**

- 14 ga x 1/4 mile
- 4 to carton/shipper
- 31 lbs.

**MODEL # 14AL2640**

- 14 ga x 1/2 mile
- 4 to carton/shipper
- 59 lbs.

**MODEL # 16AL164**

- 16 ga x 164 ft
- 16 to carton/shipper
- 12 lbs.

**MODEL # 16AL1320**

- 16 ga x 1/4 mile
- 4 to carton/shipper
- 20 lbs.

**MODEL # 16AL2640**

- 16 ga x 1/2 mile
- 4 to carton/shipper
- 40 lbs.

Aluminum electric fence wire is four times more conductive than galvanized steel and more visible.

- Lightweight and easy to install. Guaranteed against rust.
- Do not use with a weed burner style of charger.
- Recommended for use with a low impedance type energizer.



## ELECTRIC FENCE NETTING

**MODEL #****NET 35-164**

- SHEEP / GOAT / POULTRY
- 35" tall & 164' long
- COVERS UP TO 1,600 SQ. FT.

**MODEL #****NET 48-164**

- POULTRY / LIVESTOCK
- 48" tall x 164' long
- COVERS UP TO 1,600 SQ. FT.

**MODEL #****NET 48-82**

- POULTRY / LIVESTOCK
- 48" tall x 82' long
- COVERS UP TO 800 SQ. FT.



## SAFELY CONTROLS LIVESTOCK PREDATORS & DOGS

- Ideal for Farm, Ranch, Home & Garden
- Fully Assembled For Quick And Easy Set-Up
- Portable And Easy To Move
- FENCE ENERGIZER REQUIRED\* (NOT INCLUDED)

- Does Not Need To Connect End to End



# POLY FENCING & EQUINE PRODUCTS

## POLYROPE



### 7MM POLY EQUI-ROPE X 656 FT.

MODEL # 3097

- 2 rolls per carton
- Carton weight 25 lbs.

- Premium braided HDPE & polyester mix rope with 12 strands of stainless steel wire.
- 9/32" approx. diameter.
- White 1,350 lbs. average breaking strength.



### 6MM POLY EQUI-ROPE X 600 FT.

MODEL # 3094

MODEL # 3094 B

(Same as 3094, but black rope with white tracers—high visibility for horses)

- 2 rolls per carton
- Carton weight 20 lbs.

- Premium braided HDPE & polyester mix rope with 12 strands of stainless steel wire.
- 9/32" approx. diameter.
- White 1,350 lbs. average breaking strength.



### 6MM POLY TWISTED ROPE X 600 FT.

MODEL # 3365

- 2 rolls per carton
- Carton weight 17 lbs.

- Twisted HD polyethylene rope with 7 strands of stainless steel wire.
- 1 5/64" approx. diameter. 720 lbs. approximate tensile strength.



### 4MM POLY EQUI-ROPE X 656 FT.

MODEL # 3095

- 4 rolls per carton
- Carton weight 16 lbs.

- Braided HD polyethylene rope with 3 strands of stainless steel wire. 5/32" approx. diameter.
- 495 lbs. average breaking strength.



### HOT BRAID POLY ROPE X 656 FT.

MODEL # 3580

- 4 rolls per carton
- Carton weight 28 lbs.

- Super conductivity with 9 strands of mixed metal.
- Braided high density polyethylene with UV inhibitors.
- 3/16" diameter for high visibility and strength.
- Average breaking strength 500 lbs.

## POLYTAPE

Highly visible, lightweight and easy to use. A combination of weather resistant polyethylene and strong stainless steel wire conductors.



MODEL # 2327

- 1/2" wide x 200 meters/656 ft.
- 6 to ctn
- 13 lbs.

MODEL # 2346

- 1/2" wide x 400 meters/1312 ft.
- 6 to ctn
- 29 lbs.

- Woven of white UV resistant polyethylene and stainless conductor wires.
- Available in two widths. 1/2" wide with five conductors and 1 1/2" with fifteen conductors.



**MODEL # 2576 N**  
1-1/2" wide x 200 meters/656 ft.  
• 2 to ctn  
• 14 lbs.

**MODEL # 3171**  
Heavy Duty—50% heavier strands of stainless steel.

1-1/2" wide x 200 meters/656 ft.  
• 2 to ctn

☐ 3171

☒ 3171 B

- Install with tape insulators only.
- 3 to 4 twists recommended between posts to prevent whipping from wind.

## POLYWIRE

White polyethylene cord woven of UV resistant polyethylene with three strands of strong stainless steel wire. Available in two lengths. Individually shrink wrapped.



**MODEL # 2343**  
• 250 meters / 820 ft.  
• 10 to ctn • 13 lbs.

Heavy Duty — 6 strands of stainless steel.

**MODEL # 2347**  
• 400 meters/1312 ft.  
• 6 to ctn  
• 12 lbs.

**MODEL # 3174**  
• 200 meters/656 ft.  
• 6 to ctn  
• 13 lbs.

- Woven of white UV resistant polyethylene and stainless conductor wires.
- Available in two widths. 1/2" wide with five conductors and 1 1/2" with fifteen conductors.
- Install with tape insulators only. 3 to 4 twists recommended between posts to prevent whipping from wind.

**MODEL # 3177**  
• 400 meters/1312 ft.  
• 6 to ctn  
• 20 lbs.

## INSULATORS

For any polytape up to 1 1/2" wide. Insulators grip tape tightly to prevent whipping and sawing. Heavy tape holder unlocks to aid installation. Molded of all-weather high density polyethylene.



### WOOD POST INSULATOR

**MODEL # 2330-25**  
For tape. Complete with nails.  
• 25 to pkg  
• 10 pkgs to shipper  
• 15 lbs.

☒ 2330-25 B

☐ 2330-25 W

☒ 2330-25



### WOOD POST TAPE INSULATOR EXTENDER

**MODEL # 2338-25**

☐ 2338-25 W

☒ 2338-25

For polytape up to 1 1/2" wide. Extends tape 3 1/2" from post. Nails included.

- 25 to pkg
- 10 pkgs to shipper
- 18 lbs.



## WOOD POST OR VINYL POST INSULATOR

MODEL # **SNUG-HTW**

- 25 to pkg
- 20 pkgs (500) to shipper
- 19 lbs.

- For polywire, polyrope or high tensile wire.
- Use two galvanized roofing nails or two #8 x 3/4" stainless screws (not included).



## RING INSULATORS

MODEL # **2671 W**

- 10 to pkg
- 20 pkgs (200) to shipper
- 11 lbs.

MODEL # **2671-25 (BLACK)**

- 25 to pkg
- 10 pkgs (250) to shipper
- 15 lbs.



## RING INSULATOR POWER DRIVER

MODEL # **3003**

- Individually packed
- 5 to shipper
- 2 lbs.

- Use with 110V or 12 Volt power drills.
- Works with all Dare Ring Insulators



## RING INSULATORS 6" EXTENDER

MODEL # **2947-10 N**

- 10 to pkg
- 6 pkgs (60) to shipper
- 6.6 lbs.

- For wood posts.
- Holds wire, rope up to 8MM and 1/2" tape.



## EQUI-ROPE CORNER POST BRACKET KIT

MODEL # **3283 N**

- 4 to pkg
- 6 pkgs to shipper
- 3.4 lbs.

Each consists of:

- one plated steel bracket
- one #1388 insulator
- one 1/4 - 20 locking nut.



## T-POST INSULATOR

MODEL # **2334-25**


- 25 to pkg
- 10 pkgs (250) to shipper
- 12 lbs.

- For polytape up to 1 1/2" wide.
- Now holds rope and polywire.
- Fits 1.25 & 1.33 lb./ft T-posts.

 **2334-25 B**

 **2334-25 W**

 **2334-25**

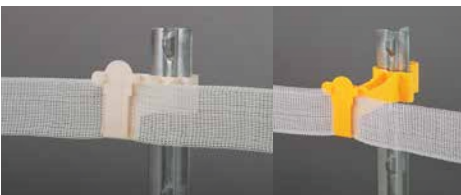

## T-POST TAPE INSULATOR EXTENDER

MODEL # **2340-25**

- 25 to pkg
- 10 pkgs (250) to shipper
- 17 lbs.

- Extends wire 3 1/2" from post.
- Fits 1.25 and 1.33 lb/ft T-post.
- For polytape up to 1 1/2" wide.

Pat. no. 6,353,137

 **2340-25 W**

 **2340-25**




## STPX-25

MODEL # STPX-25

- 25 to pkg
- 20 pkgs (500) to shipper
- 24 lbs.

 STPX-25 B

- T post insulator for Equi-Rope, coated wire, & large diameter fence materials up to 3/8".

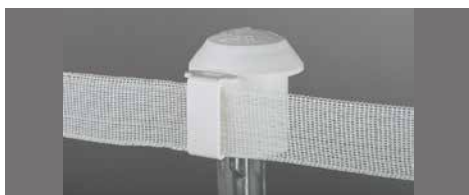


## T-POST SAFETY TOP-R

MODEL # 2929

- 10 to pkg
- 10 pkgs (100) to shipper
- 16 lbs.

- Fits all T-Posts and can be nailed on top of wood post.
- For all wire, polywire, polyrope and tape up to 1 1/2".
- Will face all directions on post.

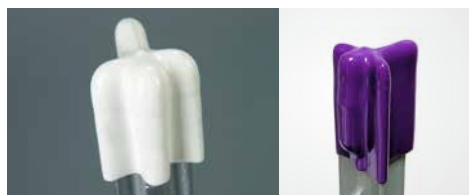

## T-POST VINYL SAFETY CAP

MODEL # 2927-25

- 25 to pkg
- 10 pkgs (250) to shipper
- 12 lbs.

 2927-25

 2927-25 P

Provides attractive top to T-Post fence line while protecting livestock from jagged tops.



## ROUND POST INSULATOR

MODEL # 2336-25

- 25 to pkg
- 10 pkgs (250) to shipper
- 13 lbs.

 2336-25 W

 2336-25

- For tape up to 1 1/2" wide.
- Fits 1/4" to 9/16" dia. posts.

Pat. no. 6,353,137



## LARGE WESTERN® FOR SUCKER RODS

MODEL # XLRP-25


- 25 to pkg
- 10 pkgs (250) to shipper
- 17 lbs.

 XLRP-25 B

 XLRP-25 W

 XLRP-25

- For oversized round posts.
- Fits 1/4" to 7/8" dia and 5/8" fiberglass T-posts.
- Holds all wire, polywire, polyrope and polytape up to 1 1/2".

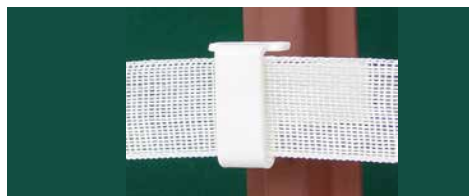

## U POST INSULATOR

MODEL # 2332-25

- 25 to pkg
- 10 pkgs (250) to shipper
- 11 lbs.

- For oversized round posts.
- For polytape up to 1 1/2" wide.
- Fits 1 3/4" to 2 1/8" wide posts.



## U POST TOP'R

MODEL # 2087


- 10 to pkg
- 10 pkgs (100) to shipper
- 15 lbs.

 2087 W

 2087

- For tape.
- Holds all wire, polywire, polyrope and polytape up to 1 1/2".

# POLYTAPE & POLYWIRE ACCESSORIES

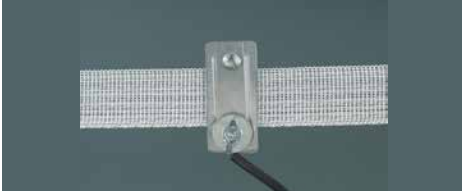

## TAPE ELECTRICAL CONNECTOR

**MODEL # 2743**

- 2 connectors to counter pkg
- 10 pkgs (20 connectors) to shipper
- 3 lbs.

- For tape up to 1 1/2".
- Use to connect fence charger to tape or as an end clamp.
- May be used to fasten 1/2" tape to a gate handle



## TAPE BUCKLE / GATE ANCHOR

**MODEL # 2768**

- 5 buckles to pkg
- 10 pkgs (50 buckles)
- 2 lbs.

**MODEL # 2880**

- Tape buckle for 1 1/2" tape.
- 2 buckles to pkg
- 10 pkgs (20)
- 2 lbs.

- For tape up to 1/2" polytape.
- Use to splice two lengths of tape.
- Attach to pinlock insulator to form gate anchor or tape end.
- Has many uses.



## CORNER AND END TENSIONERS

**MODEL # 2810 N**

- Corner Tensioner
- 2 to pkg
- 10 pkgs to shipper
- 4 lbs.

**MODEL # 2809 N**

- End Tensioner
- 2 to pkg
- 10 pkgs to shipper
- 3 lbs.

**MODEL # 3245 N**

- Tape Clip for 1 1/2" Tape
- 25 to pkg
- 10 pkgs to shipper
- 2.5 lbs.

**MODEL # 3115**

- Corner and End Tensioner for 1.25/1.33 T-posts
- 1 to pkg
- 10 pkgs to shipper
- 3 lbs.

- For 1 1/2" polytape installed on wood or T-posts.
- Use at corners, ends or T junctions.
- Fully insulated.
- All metal parts are of #300 series stainless steel.
- Insulators are molded of white high density polyethylene with UV inhibitors.
- Each assembly includes an electrical connector consisting of one self tapping lag screw and one wire terminal.



## GATE HANDLE

**MODEL # 4024**

- Gate Handle with 1 1/2" tape tensioner
- 1 to pkg
- 20 pkgs to shipper
- 6 lbs.

**MODEL # 1247 W**

- White Gate Handle only
- 10 gates to pkg
- 5 pkgs (50) to shipper
- 15 lbs.

- For 1 1/2" Polytape.



## IN-LINE TENSIONER

**MODEL # 2341**

- 1 to pkg
- 20 to shipper
- 6 lbs.

- Use with Equi-Rope and electric fence wire gauges 14 - 18.
- Molded of engineering grade polymer.
- Imported.



## IN-LINE TENSIONER HANDLE

**MODEL # 2770**

- 5 to shipper
- 10 lbs.

- For 2341 In-Line Tensioner.



## WIRE TIGHTENER

**MODEL # 2769**

- 5 to counter pkg
- 4 pkgs (20) to shipper
- 3 lbs.

- Use with polywire, 1/2" polytape, and steel wire gauges 14 thru 18.
- Not designed for high tensile.



## E-Z'REEL

**MODEL # 3199**

- 2 to shipper
- 10 lbs.

- Large winder & spool.
- Equipped with neck strap & fence hooks to hang.
- Holds 500' Equi-rope & 1 1/2" polytape; 1/4 mile of 1/2" polytape and 1 mile polywire.



## E-Z'REEL EMPTY SPOOL

**MODEL # 3200**

- 4 to shipper
- 10 lbs.

- Large winder & spool.
- Replacement spool or extra for #3199.
- Holds 500' Equi-rope & 1 1/2" polytape; 1/4 mile of 1/2" polytape and 1 mile polywire.



## TAPE AND WIRE WINDER

**MODEL # WW-1**

- 6 to shipper
- 9 lbs.

**MODEL # EFS-1**

- (extra spools)
- 10 to shipper
- 5 lbs.

- Use to recover electric fence wire, polywire or polytape.
- Complete with spool.
- Capacity—22 lbs. of steel wire or 400 meters (1/4 mile) of polywire.



## ELECTRIC ROPE CLAMP

**MODEL # 3098-2**

- 2 to pkg
- 10 pkgs (20) to shipper
- 2 lbs.

- Use to splice or end polyrope 1/4" to 5/16" in diameter.
- Also use to connect hot wire from energizer.
- New collar eases installation—acts as extra helping hand.



## POLYROPE CLAMP

**MODEL # 4004**

- 2 to pkg
- 10 pkgs (20) to shipper
- 3 lbs.

- For electric fence.
- Use for rope up to 5/16" diameter.
- Strong and secure, easy to use.
- Stainless steel.

# HIGH TENSILE FENCE SUPPLIES



## STRAINER/TIGHTENER

**MODEL # 1703**

- 20 strainers to shipper
- 11 lbs.

- With heavy cast cog and spring-loaded latch.
- Hot dip zinc coated frame exceeds type III specifications.
- No raw uncoated steel edges.



## WIRE STRAINER/TIGHTENER

**MODEL # 1703 C**

- 50 strainers to shipper
- 20 lbs.

Use to tighten:

- 9/16" Crescent
- Open End Wrench
- 1701 Strainer Handle
- 1704 In-Line Wire Wire Strainer Handle
- In-Line Strainer Handle to tighten.



## INSULATED WIRE STRAINER

**MODEL # 1703 P**

- 20 strainers to shipper
- 14.5 lbs.

- High strain end insulator built in.

Use to tighten:

- 9/16" Crescent
- Open End Wrench
- 1701 Strainer Handle
- 1704 In-Line Wire Strainer Handle



## STRAINER HANDLE

**MODEL # 1701**

- 5 to shipper
- 5 lbs.

- Use to tighten strainers no. 1703, 1703C & 1703P.

- Tension measuring scale on handle.

- Heavy riveted construction.

- Zinc plated.



## IN-LINE WIRE STRAINER HANDLE

**MODEL # 1704**

- 4 to shipper
- 4.6 lbs.

- Spring loaded for safe, rapid tensioning.

- Heavy duty galvanized steel for long life.

- Use on 1703, 1703C & 1703P wire strainers.



## NO-CUT WIRE STRAINER

**MODEL # 2775**

- 20 to shipper
- 5 lbs.

- Use to tighten high tensile and other smooth fence wire.

- Die-cast zinc.

- Tighten with #2776 or 1/2" drive socket handle.



## TIGHTENER HANDLE

**MODEL # 2776**

- 5 to shipper
- 10 lbs.

- Use with #2775



## TENSION MEASURING SPRING

### MODEL # 1713

- 20 to shipper
- 31 lbs.

- Install in each fence line together with strainer.
- Necessary to keep wires taut during temperature changes.
- Use to determine tension on wires.
- All parts are hot dip galvanized and exceed type



## GALVANIZED BARBED FENCE STAPLES

### MODEL # 1692

- 1-7/8" staple
- 50 staples to counter
- 20 pkgs (1000)
- 21 lbs.

### MODEL # 2415

- 1-7/8" staple
- 10 lbs. to counter pkg
- 4 pkgs (40 lbs)
- 43 lbs.

- Slash-cut style staple with barbs.
- Heavy .148" diameter by length shown.
- Type III zinc coating for long life.
- Suitable for high tensile and all other types of fence installations.



## BRACE PINS

### MODEL # 1714-5

- 10 in. pin
- 5 to counter pkg
- 10 pkgs (50) to shipper
- 15 lbs.

### MODEL # 1715-5

- 5 in. pin
- 5 to counter pkg
- 10 pkgs (50) to shipper
- 8 lbs.

- Use to hold horizontal wood brace beams.
- 3/8" dia. x 5" & 10"
- Galvanized steel.



## FIBERGLASS BATTEN

### MODEL # 3408

- 20 to bundle
- 12 lbs.

- 1/2" diameter x 48". 3/16" holes every 2".
- Use cotter pin type fastener #457-50 (page 17).
- UV resistant.



## WIRE DEREELEER/SPINNING JENNY

### MODEL # 2420

- 1 to counter pkg
- 5 to shipper
- 60 lbs.

- Knock-down style.
- Equipped with brake pad to prevent overrunning.
- Use to spin off coils of high tensile or ordinary fence wire. Accommodates any common weight fence wire coil.



## WIRE DEREELEER/SPINNING JENNY PROFESSIONAL MODEL

### MODEL # 2577

- 1 to shipper
- 17 lbs.

- Equipped with fully adjustable brake to prevent overrunning.
- Large angle iron base permits truck bed mounting.
- Accommodates any common weight fence wire coil.



## WIRE TWISTING TOOL

### MODEL # 1707-S

- 1 to counter pkg
- 10 pkgs to shipper
- 3 lbs.

- Use to spin, bend, splice & dice high tensile wire.
- Also use to bend T Post and batten clips. 7/16" dia x 5" zinc plated steel tool.
- Drilled three holes. (Will not chop)

**WIRE CUTTER****MODEL # 2290**

- 1 to counter pkg
- 5 to shipper
- 5 lbs.

- Specially hardened jaws designed to cut 12 1/2 ga. high tensile wire.
- Pocket size - 9" overall length.
- Imported.

**ROUND NOSE PLIERS****MODEL # 2999**

- Individually labeled
- 5 to shipper
- 6 lbs.

- For general use, fence installation & repair.
- Will not cut high tensile wire.
- Imported.

**FENCE TOOL****MODEL # 3001**

- 5 to shipper
- 8 lbs.

- For general use.
- Corrugated hammerhead, two wire cutters & staple puller.
- Large 10 1/2" overall length.
- Will not cut high tensile wire.

**CHAIN GRAB PULLER****MODEL # 2456**

- 4 to shipper
- 34 lbs.

- For the professional installer.
- Use to stretch and splice fence wire.
- Smooth jaws for minimal wire marking.
- Imported.

**FENCE POST BRACKETS****MODEL # 2965 N**


- SMALL. Use to attach 2" - 4" dia. horizontals to 3 1/2" - 5" dia. posts.
- Bulk
  - 50 to shipper
  - 5 lbs.

**MODEL # 2966**

- LARGE. Use to attach 4" - 6" dia. horizontals to 5" - 8" dia. posts.
- Bulk
  - 50 to shipper
  - 13 lbs.

- Build 'H' braces without drilling.
- Use two nailing brackets per horizontal.
- 16 gauge galvanized steel.
- Individually labeled.

# SPLICING EQUIPMENT

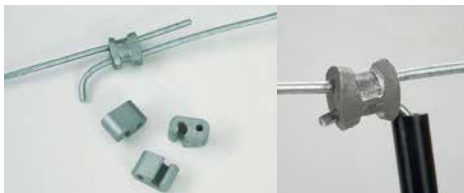**FENCE TAPS****MODEL # DPT 3-4/10**

- 10 to pkg
- 20 pkgs (200) to shipper
- 1.2 lbs.

**MODEL # DPT 3-4/100**

- 100 to pkg
- .5 lb.

Connect 12 1/2 - 14 1/2 ga. smooth wire & 15 1/2 ga. barbed wire to 12 1/2 - 16 ga. smooth hook-up wire.



## SPlicing SLEEVES

USE TO SPLICE 14 - 15 1/2 GAUGE SMOOTH WIRE.

### MODEL # DP 1-2/25

- 25 to pkg
- 20 pkgs (500) to shipper
- 1.6 lbs.

### MODEL # DP 1-2/100

- 100 to pkg
- .3 lbs.

USE TO SPLICE 12 1/2 GAUGE SMOOTH WIRE.

### MODEL # DP 2-3/25

- 25 to pkg
- 20 pkgs (500) to shipper
- 2.9 lbs.

### MODEL # DP 2-3/100

- 100 to pkg
- .5 lbs.

### MODEL # DP 2-3/500

- 500 to pkg
- 3 lbs.

EXTRA LENGTH SPlicing SLEEVES. USE IN PLACE OF TWO #DP 2-3 SLEEVES. FOR 12 1/2 GA.

### MODEL # XL 2-3/100

- 100 to pkg
- 1.0 lb.

USE TO SPLICE 10 & 11 GA. SMOOTH AND 14 & 15 1/2 GA. BARBED WIRE.

### MODEL # DP 3-4/10

- 10 to pkg
- 20 pkgs (200) to shipper
- 3.5 lbs.

### MODEL # DP 3-4/100

- 100 to pkg
- 1.6 lbs.

USE TO SPLICE 9 GA. SMOOTH, 12 1/2 & 13 1/2 GA. BARBED WIRE.

### MODEL # DP 4-5/10

- 10 to pkg
- 20 pkgs (200) to shipper
- 4.7 lbs.

### MODEL # DP 4-5/100

- 100 to pkg
- 2.2 lbs.

USE TO SPLICE 7 GA. SMOOTH WIRE.

### MODEL # DP 5-6/100\*

- 100 to pkg
- 5 lbs.



## CRIMPING TOOLS FOR SLEEVES & TAPS

### MODEL # 2154

- 1 to pkg
- 5 to shipper
- 3.2 lbs.

- Four slot hand tool to press sleeves and taps above, except DP 5-6.
- Our best selling tool.
- Imported.
- 21" overall.




## CRIMPING TOOLS FOR SLEEVES & TAPS

### MODEL # 2132

- 1 to pkg
- 5 to shipper
- 15 lbs

- Two slot hand tool to press sleeve DP 2-3 and fence tap DPT 3-4only.
- 12" overall.
- Small compact size makes your fencing chore a snap.

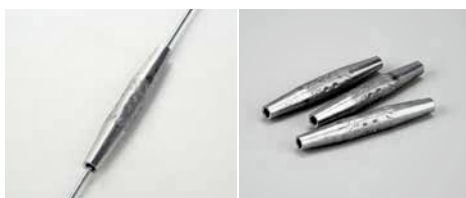

## DARELINK+

### MODEL # 2108

In-line wire splice. Fits 14-16 GA smooth wire. (.113"/.102").


### MODEL # 2081

Best for 12 1/2 GA. In-line wire splice. Fits 12-13 GA (.099"/.062")

### MODEL # 2545

In-line wire splice. Fits 8-11 GA smooth wire and Cameo & Bayco monofilament (.163"/.148")

- In-line style wire splicer.
- Use to splice high tensile and other fence wires.
- Embossed jaws grip firmly.
- No tools required.

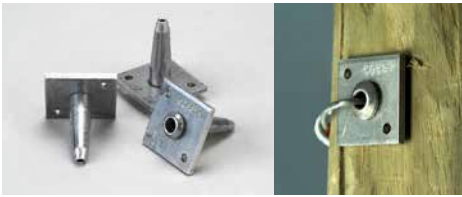

## DAREVISE

### MODEL # 2112

End post wire fastener.  
Wire size 14 - 16 GA.  
(.113"/.102")

### MODEL # 2080

Best for 12 1/2 ga.  
End post wire fastener.  
Wire size 12 - 13 GA.  
(.099"/.062")

### MODEL # 2544

End post wire fastener.  
Fits 8-11 GA smooth  
wire and Cameo &  
Bayco monofilament.  
(.163"/.148")

- A 'no knot' method to secure high tensile fence wire to end posts.
- Embossed jaws grip firmly.
- Pull tested to meet or exceed breaking strength of high tensile fence wire.



## KWIK SPLICE™

### MODEL # 3071 KWIK SPLICE SLEEVE

Galvanized steel splice for 12 1/2 - 14 ga barbed & 9 ga (.148") smooth wire.


- 50 to pkg
- 6 pkgs (300) to shipper
- 4 lbs.



### MODEL # 3072 KWIK SPLICE SLEEVE

Galvanized steel wire for 10 - 16 ga (.135"-.062") smooth & woven wire.


- 50 to pkg
- 6 pkgs (300) to shipper
- 4 lbs.

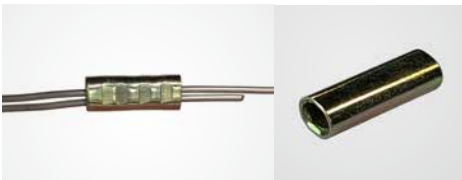

### MODEL # 3073 KWIK SPLICE SLEEVE

Galvanized steel splice for 12 1/2 - 15 1/2 (.099"-.067") smooth & woven high tensile wire.

- 50 to pkg
- 6 pkgs (300) to shipper
- 4 lbs.

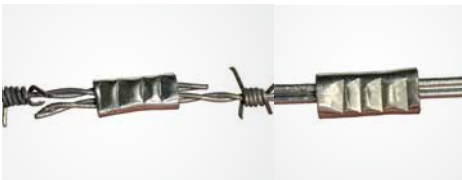

### MODEL # 3080 KWIK SPLICE SLEEVE

Galvanized steel wire for 15 1/2 ga high tensile barbed wire.

- 50 to pkg
- 6 pkgs (300) to shipper
- 5 lbs.

- Quick, easy and economical splices for fence wire, smooth & barbed.
- Splicing tool #3075 required.



## KWIK SPLICE™ CRIMPING TOOL

### MODEL # 3075 KWIK SPLICE TOOL

- 1 to carton/shipper
- 6.4 lbs.

- Use to attach/crimp KWIK SPLICE™.
- Cuts high tensile wire. 18" overall.

# GRIPPLE PLUS

Gripple Plus Wire Joiners and Tensioners range for use in fencing, trellising, and greenhouse applications.



## MODEL # 2881 N GRIPPLE PLUS SMALL

- 1.40 - 2.20, 17 -13, 300kg / 600 lb
- 10/pkg
- 10 pkgs
- 4 lbs/ctn

## MODEL # 2882 N GRIPPLE PLUS MEDIUM

- 2.00 - 3.25, 14 - 10 / 15 1/2 - 15 ga H.T. barbed wire, 400kg / 880 lb.
- 10/pkg
- 10pkgs
- 6.1 lbs/ctn

## MODEL # 2883 N GRIPPLE PLUS LARGE

- 3.25 - 4.20, 10 - 7 1/2, 600kg / 1320 lb
- 10/pkg
- 10 pkgs
- 10.5 lbs/ctn


## MODEL # 2886 N BARBED WIRE GRIPPLE

- 2.00 - 2.50, smooth 7-8 & barbed 14 - 12 1/2, 150 kg / 330 lbs
- 10/pkg
- 10 pkgs
- 6.5 lbs/ctn

## MODEL # 2885 GRIPPLE TENSIONING TOOL

## MODEL # 2436 GRIPPLE® H-POST KIT

- 36 assemblies (1 per pack) per shipper
- 31 lbs.

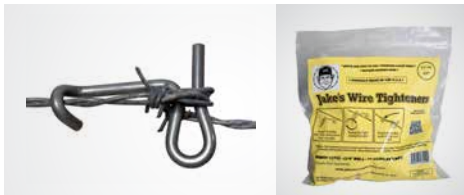


## JAKE'S WIRE TIGHTENERS

### MODEL # 11572

- 1/4" Diameter
- 20 Clips Per Bag
- Use Model 11573 Handle Tool to Tighten

### MODEL # 11672

- 5/16" Diameter
- 15 Clips Per Bag
- Use Model 11573 Handle Tool to Tighten

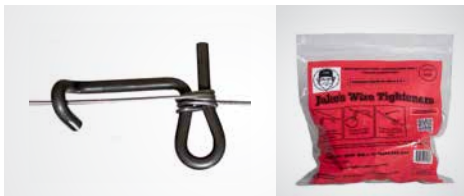

TIGHTENS OR REPAIRS YOUR FENCE IN MINUTES



SCAN THE QR CODE  
TO SEE MORE ON  
JAKE'S



## JAKE'S WIRE TIGHTENER HANDLE

### MODEL # 11573

TIGHTENS OR REPAIRS YOUR FENCE IN MINUTES

- HANDLE ONLY\*
- Model 11572 or 11672 Clips Required

# ELECTRIC FENCE TESTERS & PARTS



## ELECTRIC FENCE BEEPER

MODEL # EFB-1

- 1 per card
- 8 per strip
- 2 lbs.

Simple and easy to use for checking your electric fence.

- Emits a high pitch beep when held near a live wire.
- Works on any fence energizer brand.
- Conveniently attaches to your key ring.



## DIGITAL VOLTMETER

MODEL # 2411

- 1 to pkg
- 5 to shipper
- 4 lbs.

- For electric fence.
- Reads up to 9,999 volts.
- Very accurate and reliable.
- Powered by 9-volt battery supplied.



## MULTI-LITE

MODEL # 3360

- 1 per card
- 4 to shipper
- 1.5 lbs.

- Graduated electric fence tester shows how many volts are on the charger or on the fence line.
- Voltages are plainly marked on the case from 600 volts to 7,000 volts.



## FIVE-O-LITE TESTER

MODEL # 1360 N

- 1 per card
- 5 testers to package
- 10 testers to shipper
- wt 3 lbs.

- Graduated electric fence tester actually shows how many volts are on the charger or on the fence line.
- Voltages are plainly marked on the case from 600 volts to 5,000 volts.
- Individually carded.



## SINGLE LAMP TESTER

MODEL # 460

- 5 to pkg
- 2 to shipper
- 1 lb.

- Essential to make spot checks in the field.
- Tells whether fence is working and helps locate faults such as 'opens', 'shorts', and partial grounds.
- Lamp protected by resistor.



## FENCE GUARDIAN / NIGHT LIGHT

MODEL # 2221

- 1 to pkg
- 4 to shipper
- 3 lbs.

- Bright LED lights with 2 high visibility lenses.
- Blinks at a constant rate.
- Slows if excess load occurs.
- Below 2,000 volts, the flash stops.



## FUSES

MODEL # 485-1

- 5 to blister card
- 20 cds (100) to shipper
- 1 lb.

MODEL # 3151

- 1 AMP 250-V GDB. Special fast-blow fuse for Dare Energizers.
- 5 per pkg

- Fits most types of electric fence controllers.
- Dimensions 1/4" x 1 1/4". AGC - 1 amp.

# PANS & PAILS



## PAN

### MODEL # 1566

5-quart utility pan (4.6 liters). Top diameter: 11 5/8", height: 4 1/8", bottom diameter: 9 1/2". 14 ozs. each.

- 5 qt. pan
- 11lbs.

### MODEL # 1604

12-quart utility basin (11.2 liters). Large enough to use when draining oil. Top diameter: 17", height: 4 1/4", bottom diameter: 13 1/2", 27 ounces.

- 12 qt. pan
- 20 lbs.

- Shoats, goats, hogs, dogs...soaking your feet and travel kitty litter pans...there are many uses for these handy pans.

- 1/8" side walls makes them longer lasting and resistant to damage, destruction, and weather.

- Black smooth finish.

- Easily cleaned.

- Resilient polyethylene.



## PAIL

### MODEL # 1609

- 10 qt. pail
- packed 12 to shipper
- 15 lbs.

- 10-quart (9.46 liters) best quality polyethylene.

 1609 BLACK

 1609 WHITE

 1609 RED

# INSTALLATION ACCESSORIES



## LIGHTNING ARRESTOR KIT

**MODEL # LA-112**

- 1 to blister pkg
- 10 pkgs to shipper
- 5 lbs.

Heavy duty, farm tested and proven, electric fence lightning arrestor.

- Complete with wire clamp, ground rod clamp and mounting screws.
- Imported.



## SURGE PROTECTOR

**MODEL # 2219**

- 1 per card
- 5 cards per shipper
- 1 lb.

- A must for every 110-V fence controller.
- Protect electronic equipment from power surges.
- Light 'On' working—Light 'off' tripped surge, reset by unplugging and resume normal operation.
- Rating 15A-125 VAC-60Hz-1875 W-500 Volts type 3 SPD.
- Meets UL and CSA standards.



## INSULATOR TUBING

**MODEL # 2453**

- 50 ft
- 10 coils to shipper
- 11 lbs.

- Has many uses.
- Black polyethylene tubing accomodates up to 12 1/2 gauge fence wire.
- Use under driveways, gates, to insulate one wire from another.



## JUMPER LEADS

**MODEL # 3556**

- 1 to pkg
- 10 pkgs to shipper
- 3 lbs.

- For electric fence. Use with smooth steel wire, polywire, electric rope and 1/2" tape.
- Quick solid connections for temporary fencing.
- Use between 'hot' wires, ground wires or energizer to fence.



## UNDERGROUND & HOOK-UP WIRE

**14 GA GALV. CORE WIRE**

**MODEL # 2488**

- 50 ft per spool
- 5 spls per shipper
- 10 lbs.

**MODEL # 2212-250**

- 500 ft per spool
- 1 spl per shipper
- 18 lbs.

**MODEL # 2212**

- 165 ft per spool
- 1 spl per shipper
- 6 lbs.

**12 1/2 GA GALV. CORE WIRE**

**MODEL # 2277**

- 165 ft per spool
- 1 spl per shipper
- 23 lbs.

- Two layers of polyethylene over class III galvanized steel wire.
- Perfect for underground use and to connect fence charger to fence.
- Designed for direct burial.
- Withstands 20,000 volts.



## SPLIT BOLT/LINE TAP & DARE LINE CLAMP/TAP

**MODEL # 2083**

- 10 to pkg
- 10 pkgs (100) to shipper
- 8 lbs.

**MODEL # 2083-3 N**

- 3 to pkg
- 10 pkgs (30) to shipper
- 2.5 lbs.

- Die cast zinc split bolt and washer with galvanized steel nut provide trouble-free connections.
- Use to connect hook-up or grounding wire to fence.
- Not a splice.



## ELECTRIC FENCE SWITCH

### MODEL # 2211

- Single throw switch
- 10 to shipper
- 5 lbs.

### MODEL # 2199

- Double throw switch
- 10 to shipper
- 6 lbs.

- For outdoor use on electric fence.
- Install several in each electric fence for convenience and safety.
- Switch off areas to allow repairs.
- Use to change polarity of fence wires.



## ENERGY LIMITER

### MODEL # 2209

- 1 to pkg
- 1 lb.

- Restricts the flow of current to specific sections of fence that may be shorted by rising water, snow, or weed growth.
- Prevents shorted wire from grounding entire fence.
- Also known as 'FLOOD GATE CONTROLLER'.



## GROUND RODS & GROUND CLAMPS

### MODEL # 2303

- DIE CAST ZINC GROUND CLAMP - Blister packed
- 1 to pkg
- 10 to shipper
- 2 lbs.

### MODEL # 2301-1

- HOT DIPPED GALVANIZED STEEL GROUND ROD 5/8" DIA X 6'
- 10 to bundle
- 58 lbs.

- The most important part for an effective electric fence installation.

- Use one to three (or more) ground rods as suggested by the fence controller manufacturer.



## ELECTRIC FENCE WARNING SIGN

### MODEL # 3400

- 10 to shipper
- 1.8 lbs.

LARGE. 5 1/2" x 9"

- Easily attaches to wire, Equi Rope and Poly Tape.
- Black on yellow.
- Individually labeled.



## ELECTRIC FENCE WARNING SIGN

### MODEL # 1614-3

- 3 to pkg
- 20 pkgs (60) to shipper
- 3 lbs.

- Printed on both sides.
- 4" x 8" with bold black letters on bright yellow laminated vinyl.
- Two holes to anchor on post or hang from wire.

# FARM TANK FLOAT VALVES



## ALUMINUM HOUSED FLOAT VALVE

**MODEL # 1780**

- 1 to pkg
- 6 to shipper
- 10.5 lbs.

- Precision die cast outer housing.
- Encased styrofoam float.
- Two sets of brackets—fits poly tanks and steel tanks. 300 GPH.



## PLASTIC HOUSED FLOAT VALVE ECONOMY MODEL

**MODEL # 798**

- 1 to pkg
- 6 to shipper
- 8.5 lbs.

- Low priced, very efficient and reliable.
- Outer housing molded of high impact resin.
- Withstands weather and abuse.
- Encased styrofoam float.



## ALUMINUM HOUSED NON-SIPHONING FLOAT VALVE

**MODEL # 1800**

- 1 to pkg
- 6 to shipper
- 11 lbs.

- Precision die-cast aluminum float housing, Encased styrofoam float and molded non-siphoning unit. 300GPH.
- Complies with basic anti-siphoning regulations.



## PLASTIC HOUSED NON-SIPHONING FLOAT VALVE

**MODEL # 2175**

- 1 to pkg
- 6 to shipper
- 9 lbs.

- Economy Model.
- Float housing molded of high impact ABS plastic.
- Has same float and non-siphoning unit as valve listed above.



## REPLACEMENT PARTS INTERIOR FLOAT ASSEMBLY

**MODEL # 1041**

- 6 to shipper
- 2 lbs.

**MODEL # 1770**

- Neoprene seal—Fits on top of float assembly.
- No standard shipper

- Fits 798, 1780, 2175 & 1800



## REPLACEMENT PARTS REPLACEABLE ORIFICES

**MODEL # 1394**

- Standard volume - fits 798 & 1780

**MODEL # 1252**

- Low volume - fits 798 & 1780

**MODEL # 1482**

- Standard volume - fits 1800 & 2175



## REPLACEMENT PARTS NON-SIPHONING TUBULAR VENT ASSEMBLY

**MODEL # 1533**

- Individually pkd
- 6 to shipper
- 2 lbs.

- Complete tube, valve stem, valve and replacement orifice.

# BETTER SHOPPING EXPERIENCE INCREASED SALES OPPORTUNITY



## LET DARE SHOW WHAT WE CAN DO FOR YOU




SCAN THE QR CODE TO

**WATCH THE DARE DIFFERENCE  
WITH AN EFFECTIVE PLANOGRAM**

# PLANOGRAMS & MERCHANDISING


## ELECTRIC FENCING CENTER EXAMPLE OF 4'

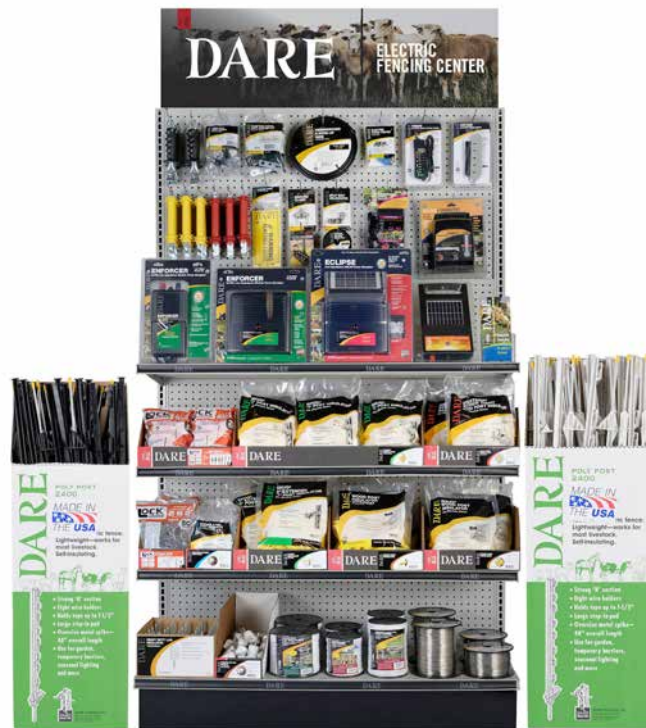

## ELECTRIC FENCING NETTING EXAMPLE



## IN-STORE DISPLAYS FOR ALL FENCING

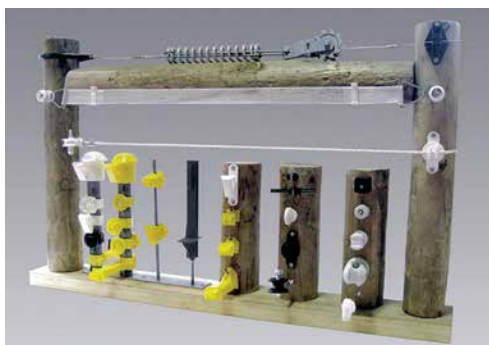

## HOW TO BOOKLETS & GUIDES



# ELECTRIC FENCING CENTER

EXAMPLE OF 8'




# HIGH TENSILE CENTER

EXAMPLE OF 4'



# FENCING HEADER SIGNS

FOR ALL CATEGORIES INCLUDING EQUINE AND HIGH TENSILE.  
TWO STYLES: LIFESTYLE (LEFT) OR PRODUCT (RIGHT)

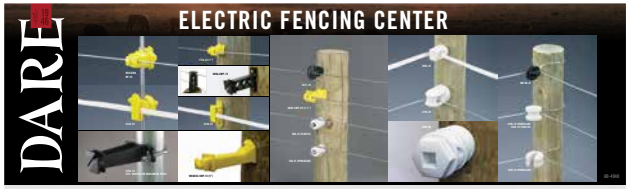


# RETAIL DISPLAY BOXES

6" – 1' – 2'



# BOX LABELS & BIN TAGS

FOR MOST ITEMS

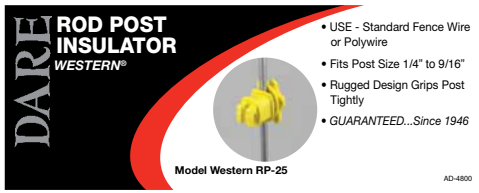

# DARE

-est.- 1946

CALL TOLL FREE: 1-800-922-DARE (3273)  
PHONE: (269) 965-2307  
FAX: (269) 965-3261  
E-MAIL: [SERVICE@DAREPRODUCTS.COM](mailto:SERVICE@DAREPRODUCTS.COM)

860 BETTERLY ROAD / SPRINGFIELD, MI 49037 USA



SCAN THE QR CODE & SEE WHAT DARE HAS FOR YOU ONLINE

[DAREPRODUCTS.COM](http://DAREPRODUCTS.COM)

AD-5039



DARE

ELECTRIC FENCING SINCE 1946